

WORKING HEIGHT
98 ft 5 in
30 m

HORIZONTAL OUTREACH
50 ft 10 in
15.5 m

BASKET CAPACITY
496 lbs
225 kg

MACHINE WEIGHT
11,023 lbs
5.00 t

TRACKED AERIAL PLATFORM

Cela DT 100 Crawler

EU MODEL DT CRAWLER 30

98 feet of working height and 50 ft 10 in of outreach on a self-loading crawler. Hydraulically extendable tracks and a Tier 4 diesel, with a hybrid version available.

Flies over everything
52 ft 6 in of up-and-over clearance to reach past roofs and obstacles.

Authorized height landing
Manufacturer-authorized exit from the basket at height.

Self-loading mode
Loads itself onto a truck bed up to 4 ft 3 in high, 4 ft 6 in with extension outriggers.

Hybrid available
Tier 4 diesel as standard for the US market; hybrid version available.

STANDARD COMPLIANCE: ANSI A92.20 | CSA B354.6 | EN 280 | CE | EN 13000 crane

Cela DT 100 Crawler Technical specifications

gotlift.com


STOWED DIMENSIONS

Cela DT 100 Crawler

Length **17 ft 9 in**
Width **3 ft 11 in**
Height **7 ft 6 in**



WORKING RANGE

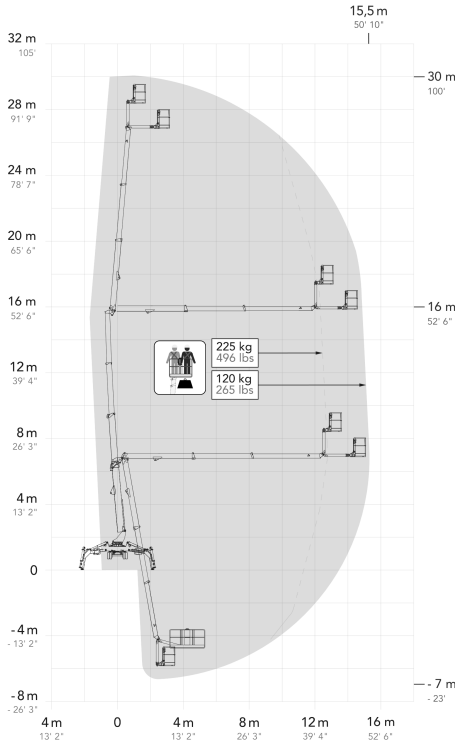

Working range · load zones 496 / 265 lbs

PERFORMANCE

Working height	**98 ft 5 in**	30 m
Platform height	**91 ft 10 in**	28 m
Horizontal outreach	**50 ft 10 in**	15.5 m
Up-and-over clearance	**52 ft 6 in**	16 m
Below-ground reach	**−23 ft**	−7 m
Basket capacity	**496 lbs**	225 kg
Basket, aluminium (L × W × H)	**5'11" × 2'4" × 3'7"**	1800 × 700 × 1100 mm
Basket rotation	**±90°**	
Turret rotation	**450°**	

DIMENSIONS & TRANSPORT

Length, without cage	**17 ft 9 in**	5415 mm
Width, without cage	**3 ft 11 in**	1200 mm
Height, stowed	**7 ft 6 in**	2290 mm
Weight	**11,023 lbs**	5.00 t
Outrigger footprint, wide	**19'3" × 14'**	5880 × 4280 mm
Outrigger footprint, narrow	**16' × 10'2"**	4895 × 3105 mm
Under-track clearance	**2 ft 2 in**	667 mm
Self-loading height	**4 ft 6 in**	1385 mm

STANDARD EQUIPMENT

- Self-loading, max loading height 4'3"
- Tier 4 three-cylinder water-cooled diesel
- Automatic stabilization device
- Start/stop engine from the cage
- Remote management & diagnostic software (CRSS)
- Hydraulically extendable tracks
- 110 V/60 Hz electro pump with battery charger
- All-function radio control
- 110/120 V electric connection in the cage
- Emergency hand pump · flanged lock valves on cylinders

Options: Electric winch (440 lbs) · hoist hook (551 lbs) · aluminium and fiberglass cages · material-handling cage · white non-marking tracks · extension outriggers for self-loading · ultrasonic anti-trap protection · custom paint

Put a DT 100 Crawler to work for you.

Pricing, configuration and delivery — talk to the Gotlift sales team.

CALL 877-959-4456
EMAIL info@gotlift.com
WEB gotlift.com