

NO CDL REQUIRED
Drive it with a regular license *

WORKING HEIGHT
131 ft 3 in
40 m

HORIZONTAL OUTREACH
64 ft
19.5 m

BASKET CAPACITY
661 lbs
300 kg

UP & OVER HEIGHT
62 ft 4 in
19 m

TRUCK-MOUNTED AERIAL PLATFORM

Cela DT 131 Truck

EU MODEL DT TRUCK 40

131 feet of working height and 64 feet of outreach on a truck chassis from 16,534 lbs GVW. Front and rear automatic stabilizers and a 661 lbs basket.

No CDL required *
Mounted on a truck chassis up to 26,000 lbs GVWR. Any driver with a regular license takes it to the job.

Fits one lane
Outriggers and boom stay on the work side. Nothing overhangs into the opposite lane.

Moves like an elevator
The basket travels straight up and down, keeping its distance to the façade.

No pantograph
A straight telescopic boom: simple, predictable maneuvering at height.

Drives like a regular truck
The boom sits low, level with the cab. Low center of gravity, regular-truck handling.

Levels itself
Automatic stabilization sets up on slopes of up to 9%.

* On chassis with GVWR up to 26,000 lbs, no commercial driver's license is required under federal rules. Check your state's requirements.

Cela DT 131 Truck Technical specifications

gotlift.com


STOWED DIMENSIONS

Cela DT 131 Truck

Length **26 ft 5 in**
Width **7 ft 5 in**
Height **10 ft 2 in**



WORKING RANGE

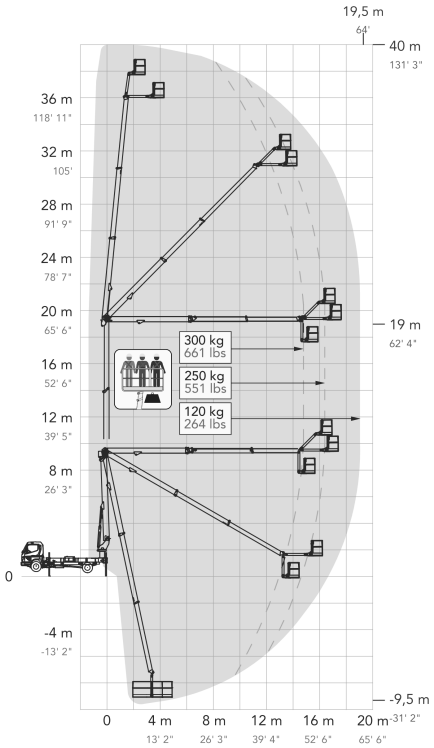

Working range · load zones 661 / 551 / 264 lbs

PERFORMANCE

Working height	**131 ft 3 in**	40 m
Horizontal outreach	**64 ft**	19.5 m
Up-and-over clearance	**62 ft 4 in**	19 m
Below-ground reach	**−31 ft 2 in**	−9.5 m
Basket capacity	**661 lbs**	300 kg
Basket, aluminium (L × W × H)	**6'7" × 2'7" × 3'7"**	2000 × 800 × 1100 mm
Basket rotation	**±90°**	
Turret rotation	**1440°**	

DIMENSIONS, STOWED *

Overall length	**26 ft 5 in**	8060 mm
Width	**7 ft 5 in**	2250 mm
Height	**10 ft 2 in**	3100 mm
Stabilizer extension, full	**4 ft 4 in**	1325 mm
Minimum chassis GVW	**16,534 lbs**	7.5 t

* Dimensions depend on the chassis.

STANDARD EQUIPMENT

- Fully electronic CAN-bus control system
- Remote management & diagnostic software (CRSS)
- Start/stop engine from the cage
- 3.5" CAN-bus display in the cab
- Extended-stroke outriggers (2'6") with wooden pads
- Automatic stabilization device
- Boom and truck-cab anti-collision device
- 110/120 V electric connection in the cage
- Front & rear auto-extending stabilizer beams
- Emergency hand pump · flanged lock valves on cylinders

Options: Hoist hook (750 lbs, crane certification included) · electric winch (661 lbs) · extendable, fiberglass and material-handling cages · anemometer · stabilization controls from the cage · radio control · ultrasonic anti-trap protection · custom paint

Put a DT 131 Truck to work for you.

Pricing, configuration and delivery — talk to the Gotlift sales team.

CALL 877-959-4456
EMAIL info@gotlift.com
WEB gotlift.com