

WORKING HEIGHT
80 ft
25 m

HORIZONTAL OUTREACH
39 ft 5 in
12 m

BASKET CAPACITY
507 lbs
230 kg

UP & OVER HEIGHT
45 ft 11 in
14 m

TRUCK-MOUNTED AERIAL PLATFORM

Cela DT 80 Truck

EU MODEL DT TRUCK 25

80 feet of working height on a truck chassis from 7,716 lbs GVW. Fully electronic CAN-bus controls, automatic stabilization and 1440° of turret rotation, in a package you can drive to the job.

No CDL required *
Mounted on a truck chassis up to 26,000 lbs GVWR. Any driver with a regular license takes it to the job.

No pantograph
A straight telescopic boom: simple, predictable maneuvering at height.

Fits one lane
Outriggers and boom stay on the work side. Nothing overhangs into the opposite lane.

Drives like a regular truck
The boom sits low, level with the cab. Low center of gravity, regular-truck handling.

Moves like an elevator
The basket travels straight up and down, keeping its distance to the façade.

Levels itself
Automatic stabilization sets up on slopes of up to 9.5%.

STANDARD COMPLIANCE: ANSI A92.20 | CSA B354.6 | EN 280 | CE | EN 12999 crane

* On chassis with GVWR up to 26,000 lbs, no commercial driver's license is required under federal rules. Check your state's requirements.

Cela DT 80 Truck Technical specifications

gotlift.com


STOWED DIMENSIONS

Cela DT 80 Truck

Length **21 ft 9 in**
Width **6 ft 9 in**
Height **7 ft 5 in**



WORKING RANGE

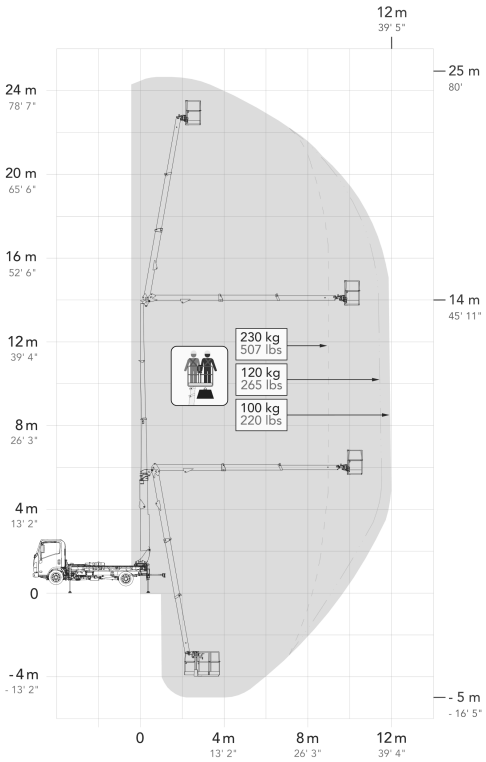

Working range · load zones 507 / 265 / 220 lbs

PERFORMANCE

Working height	**80 ft**	25 m
Horizontal outreach	**39 ft 5 in**	12 m
Up-and-over clearance	**45 ft 11 in**	14 m
Below-ground reach	**−16 ft 5 in**	−5 m
Basket capacity	**507 lbs**	230 kg
Basket, aluminium (L × W × H)	**4'7" × 2'4" × 3'7"**	1400 × 700 × 1100 mm
Basket rotation	**±90°**	
Turret rotation	**1440°**	

DIMENSIONS, STOWED *

Overall length	**21 ft 9 in**	6640 mm
Width	**6 ft 9 in**	2050 mm
Height	**7 ft 5 in**	2245 mm
Stabilizer extension, full	**3 ft 2 in**	975 mm
Minimum chassis GVW	**7,716 lbs**	3.5 t

* Dimensions depend on the chassis.

STANDARD EQUIPMENT

- Fully electronic CAN-bus control system
- Remote management & diagnostic software (CRSS)
- Start/stop engine from the cage
- 3.5" CAN-bus display in the cab
- Multi-axial level · hour counter
- Automatic stabilization device
- Boom and truck-cab anti-collision device
- 110/120 V electric connection in the cage
- Rear stabilizer beams with automatic hydraulic extension
- Emergency hand pump · flanged lock valves on cylinders

Options: Hoist hook (573 lbs, crane certification included) · electric winch (507 lbs) · fiberglass and material-handling cages · stabilization controls from the cage · ultrasonic anti-trap protection · custom paint

Put a DT 80 Truck to work for you.

Pricing, configuration and delivery — talk to the Gotlift sales team.

CALL 877-959-4456
EMAIL info@gotlift.com
WEB gotlift.com