

WORKING HEIGHT
82 ft
25 m

HORIZONTAL OUTREACH
39 ft 4 in
12 m

BASKET CAPACITY
507 lbs
230 kg

MACHINE WEIGHT
6,503 lbs
2.95 t

TRACKED AERIAL PLATFORM

Cela DT 80 Crawler

EU MODEL DT CRAWLER 25

82 feet of working height on tracks just 2 ft 8 in wide. Self-loading, hydraulically extendable tracks and a Tier 4 diesel, with electric and hybrid versions available.

Flies over everything
45 ft 11 in of up-and-over clearance to reach past roofs and obstacles.

Authorized height landing
Manufacturer-authorized exit from the basket at height.

Self-loading mode
Loads itself onto a truck bed up to 5 ft high.

Electric & hybrid
Tier 4 diesel as standard; electric and hybrid versions available.

Cela DT 80 Crawler Technical specifications

gotlift.com


STOWED DIMENSIONS

Cela DT 80 Crawler

Length **14 ft 2 in**
Width **2 ft 8 in**
Height **6 ft 6 in**



WORKING RANGE

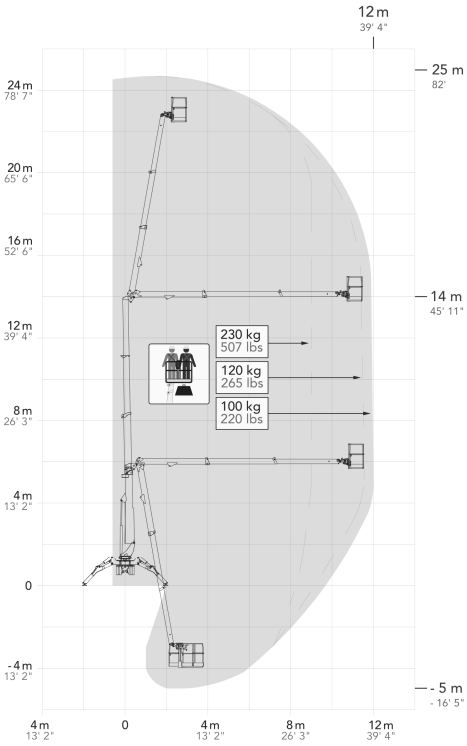

Working range · load zones 507 / 265 lbs

PERFORMANCE

Working height	**82 ft**	25 m
Platform height	**75 ft 5 in**	23 m
Horizontal outreach	**39 ft 4 in**	12 m
Up-and-over clearance	**45 ft 11 in**	14 m
Below-ground reach	**−16 ft 5 in**	−5 m
Basket capacity	**507 lbs**	230 kg
Basket, aluminium (L × W × H)	**4'7" × 2'4" × 3'7"**	1400 × 700 × 1100 mm
Basket rotation	**±90°**	
Turret rotation	**720°**	

DIMENSIONS & TRANSPORT

Length, without cage	**14 ft 2 in**	4315 mm
Width, without cage	**2 ft 8 in**	825 mm
Height, stowed	**6 ft 6 in**	1998 mm
Weight	**6,503 lbs**	2.95 t
Outrigger footprint, wide	**15'9" × 11'10"**	4815 × 3600 mm
Outrigger footprint, narrow	**12' × 8'1"**	3650 × 2470 mm
Under-track clearance	**1 ft 7 in**	483 mm
Self-loading height	**5 ft**	1500 mm

STANDARD EQUIPMENT

- Hydraulically extendable tracks
- 110 V/60 Hz electro pump with battery charger
- All-function radio control
- 110/120 V electric connection in the cage
- Multi-axial level · hour counter
- Tier 4 three-cylinder water-cooled diesel
- Automatic stabilization device
- Start/stop engine from the cage
- Remote management & diagnostic software (CRSS)
- Emergency hand pump · flanged lock valves on cylinders

Options: Electric winch (507 lbs) · hoist hook (573 lbs) · larger, smaller and fiberglass cages · material-handling equipment · white non-marking tracks · extension outriggers for self-loading · ultrasonic anti-collision alarm · custom paint

Put a DT 80 Crawler to work for you.

Pricing, configuration and delivery — talk to the Gotlift sales team.

CALL 877-959-4456
EMAIL info@gotlift.com
WEB gotlift.com